

## ITMBT - ITMZBT - FLBT - FLZBT

Cold rooms dehumidifiers



ITMBT - ITMZBT - FLBT - FLZBT

ITMBT/FLBT low temperature dehumidifiers series are high-performances units especially designed for low temperature cold rooms rooms where the humidity level should be controlled during product storage treatment.

This series comprises 4 model which cover a capacity range from 155 l/24h to 460 l/24h.

ITMBT/FLBT units are designed for easy maintenance and service, each part being readily accessible and, when required, easily replaceable thus reducing service and maintenance costs.

All units are supplied with hot gas defrost system and anti-freeze heater on condensate drip tray, they are fully assembled and wired at the factory.

### VERSIONS

**ITMZBT Version with temperature control:** These versions are supplied with a remote condenser and are used in those applications where it is necessary the simultaneous control of temperature and humidity: Dehumidification mode: the internal condenser is activated; the unit dehumidifies and heats up the room temperature; Cooling mode: the remote condenser is activated; the unit dehumidifies and cools down the room temperature.

### ACCESSORIES

- FARC** Air filter with frame for ducted installation.
- HORI** Condensate discharge pump.
- HYGR** Integrated mechanical hygrostat.
- HYGR** Remote mechanical hygrostat.
- HYGR** Remote mechanical hygrostat + thermostat.
- INOX** Stainless steel frame.
- PM** Available static pressure 200 Pa.
- POSC** Horizontal air discharge.
- TROL** Floor trolley version.

Models ITMBT - FLBT		ITMBT330	ITMBT400	FLBT940
Moisture removed <sup>(1)</sup>	l/24h	155,8	189,8	456,9
Total power input <sup>(1)</sup>	kW	4,3	5,4	11,1
Max power input <sup>(2)</sup>	kW	4,5	7,0	13,5
Max input current <sup>(2)</sup>	A	11,7	13,7	30,5
Peak current	A	66,2	74,7	170,5
Air flow	m³/h	3600	4100	8200
Available static pressure	Pa	50	50	50
Refrigerant		R407C	R407C	R407C
Sound pressure <sup>(3)</sup>	dB(A)	66	68	74
Temperature operating range	°C	1 +18	1 +18	1 +18
Humidity operating range	%	50-99	50-99	50-99
Power supply	V/Ph/Hz	400/3+N/50	400/3+N/50	400/3+N/50

Models ITMZBT - FLZBT		ITMZBT330	ITMZBT400	FLZBT940
Moisture removed <sup>(1)</sup>	l/24h	155,8	189,8	456,9
Input power <sup>(1)</sup>	kW	4,3	5,4	11,1
Cooling capacity <sup>(3)</sup>	kW	10,9	12,1	24,7
Total power input <sup>(3)</sup>	kW	6,0	7,0	11,1
Max power input <sup>(4)</sup>	kW	4,5	7,0	13,5
Max input current <sup>(4)</sup>	A	13,4	15,4	35,4
Peak current	A	67,9	74,7	173,4
Air flow	m³/h	3600	4100	8200
Available static pressure	Pa	50	50	50
Refrigerant		R407C	R407C	R407C
Sound pressure <sup>(3)</sup>	dB(A)	66	68	74
Temperature operating range	°C	1 +18	1 +18	1 +18
Humidity operating range	%	50-99	50-99	50-99
Power supply	V/Ph/Hz	400/3+N/50	400/3+N/50	400/3+N/50

Performances refer to the following conditions:

(1)Room temperature 15°C; relative humidity 80%.

(2)Room temperature 18°C; relative humidity 80%.

(3)Room temperature 15°C; relative humidity 80%; ambient temperature 35°C.

(4)Room temperature 18°C; relative humidity 80%; ambient temperature 35°C.

(5)Sound pressure level measured at 1 mt from the unit in free field conditions according to ISO 9614.

## FRAME

All units are made from hot-galvanised thick sheet metal, painted with polyurethane powder enamel at 180°C to ensure the best resistance against the atmospheric agents. The frame is self-supporting with removable panels. The drip tray is present standard in all ITM units and it's in stainless steel. The colour of the units is RAL 7035.

## REFRIGERANT CIRCUIT

The refrigerant gas used in these units is R407C. The refrigerant circuit is made by using international primary brands components and according to ISO 97/23 concerning welding procedures. The refrigerant circuit includes: sight glass, filter drier, thermal expansion valve with external equalizer, Schrader valves for maintenance and control, pressure safety device (according to PED regulation).

## COMPRESSOR

The compressor is scroll type with crankcase heater and thermal overload protection by a klixon embedded in the motor winding. It's mounted on rubber vibration dampers and, by request, it can be supplied with some jackets to reduce the noise (accessory). The crankcase heater, when present, is always powered when the compressor is in stand-by. The inspection is possible through the frontal panel of the unit.

## CONDENSER AND EVAPORATOR

The condensers and evaporators are made of copper pipes and aluminium fins. The diameter of the copper pipes is 3/8" and the thickness of the aluminium fins is 0,1 mm. The tubes are mechanically expanded into the aluminium fins to improve the heat exchange factor. The geometry of these condensers guarantees a low air side pressure drop and then the use of low rotation (and low noise emission) fans. All the units have a stainless steel drip tray. Besides this, each evaporator is supplied of a temperature probe used as automatic antifreeze probe.

## FAN

The fan is centrifugal type. It's statically and dynamically balanced and supplied complete of the safety fan guard according to EN 294. It's mounted on the unit frame by interposition of rubber vibration dampers.

The electric motor is at 4 poles (about 1500 rpm). Connected to the fan by belts and pulleys and it's equipped of an integrated thermal overload protection. The protection class of the motors is IP 54.

## AIR FILTER

It's supplied standard with the unit. It's made of filtering material in synthetic fibre without electrostatic charge. It can be removed for differential disposal, class G3, according to EN 779:2002.

## MICROPROCESSOR

All units are supplied standard with microprocessor controls. The microprocessor controls the following functions: compressor timing, automatic defrost cycles, alarms. An appropriate LCD display shows the operation mode of the unit, set point and alarms.

## ELECTRIC BOX

The electric switch board is made according to electromagnetic compatibility norms CEE 73/23 and 89/336. The accessibility to the board is possible after removing the front panel of the unit and the OFF positioning of the main switch. In all units are installed, standard, the compressors sequence relay which disables the operation of the compressor in case the power supply phase sequence is not the correct one (scroll compressors in fact, can be damaged if they rotate reverse wise). The following components are also standard installed: main switch, magnetic-thermal switches (as a protection of pumps and fans), compressors fuses, control circuit automatic breakers, compressor contactors. The terminal board is also supplied with voltage free contacts for remote ON-OFF.

## CONTROL AND PROTECTION DEVICES

All units are supplied with the following control and protection devices: defrost thermostat, who signals to the microprocessor control that a defrost cycle is needed and controls its termination, high pressure switch with manual reset, low pressure switch with automatic reset, high pressure safety valve, compressor thermal overload protection, fans thermal overload protection.

## TEST

All the units are fully assembled and wired at the factory, carefully evacuated and dried after leak tests under pressure and then charged with refrigerant R407C. They are all fully operational tested before shipment. They all conform to European Directives and are individually marked with the CE label and provided with Conformity Declaration.


## REMOTE CONDENSER

The remote condensers are made of copper pipes and aluminium fins. The diameter of the copper pipes is 3/8" and the thickness of the aluminium fins is 0,1 mm. The tubes are mechanically expanded into the aluminium fins to improve the heat exchange factor. The geometry of these condensers guarantees a low air side pressure drop and then the use of low rotation (and low noise emission) fans. The fans are axial type with aluminium aerofoil blades complete of the safety fan guard. The protection class of the motors is IP 54. Furthermore the remote condenser is supplied of the low ambient condensing pressure control. This device controls the cooling circuit condensing pressure at different ambient temperatures, to keep it correct.




Versions ITMBT - ITMZBT - FLBT - FLZBT	Code	ITMBT330	ITMBT400	FLBT940	ITMZBT330	ITMZBT400	FLZBT940
Integrated mechanical hygrostat	HYGR	○	○	○	–	–	–
Remote mechanical hygrostat	HYGR	○	○	○	–	–	–
Remote mechanical hygrostat + thermostat	HYGR	–	–	–	○	○	○
Available static pressure 200 Pa	PM	○	○	○	○	○	○
Floor trolley version	TROL	○	○	○	–	–	–
Stainless steel frame	INOX	○	○	○	○	○	○
Air filter with frame for ducted installation	FARC	○	○	○	○	○	○
Condensate discharge pump	POSC	–	–	○	–	–	○
Horizontal air discharge	HORI	–	–	○	–	–	○
Umidity and Temperature electronic probe sensor	RGDD	–	–	–	–	–	–
Remote control Panel	PCRL	–	–	–	–	–	–

● Standard, ○ Optional, – Not available.

## ITMBT

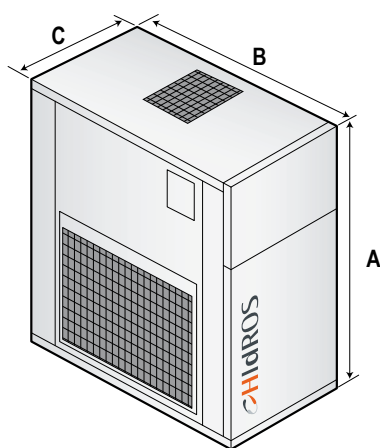

## FLBT

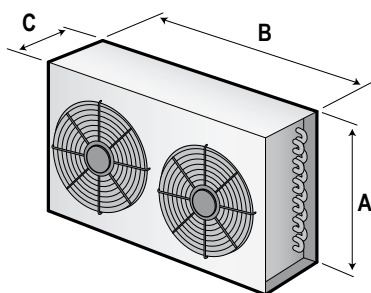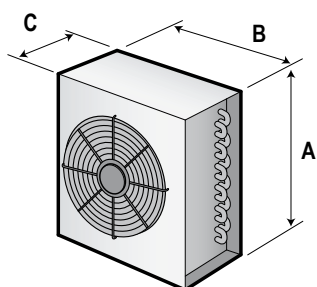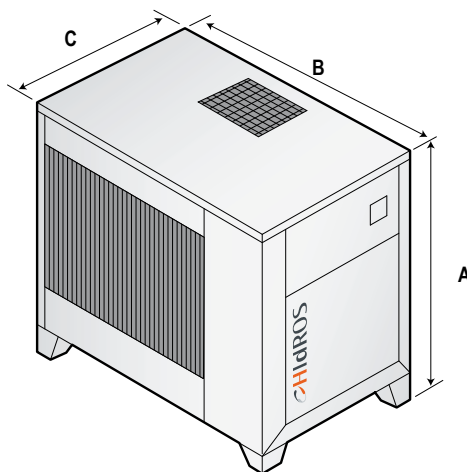

Mod.	A (mm)	B (mm)	C (mm)	Kg
ITMBT330	1283	1004	635	184
ITMZBT330	1283	1004	635	205
ITMBT400	555	1380	362	188
ITMZBT400	555	1380	362	220
FLBT940	828	2015	428	451
FLZBT940	828	2015	428	490

### Remote condenser (Only Z versions)

Mod.	A (mm)	B (mm)	C (mm)
ITMZBT330	555	1380	362
ITMZBT400	555	1380	362
FLZBT940	828	2015	428